



Características


Construção segundo: EN 12842:2012

Pressão de operação: PN16

Materiais

Corpo: Ferro fundido dúctil (GGG50)

Revestimento: Epóxi potável aplicado electrostaticamente com espessura de ≥ 250µm

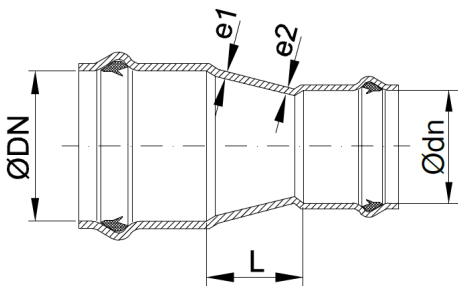

DN / dn	Corpo					Peso (Kg.)
	Ø DN	Ø dn	L	e1	e2	
50 / 40	50	40	20	6	6	2,4
63 / 50	63	50	20	6	6	2,6
75 / 63	75	63	20	6,5	6	3,7
90 / 50	90	50	30	6,5	6	3,7
90 / 63	90	63	25	6,5	6	4,7
90 / 75	90	75	20	6,5	6,5	4,9
110 / 63	110	63	35	6,5	6	5,7
110 / 75	110	75	35	6,5	6,5	6
110 / 90	110	90	35	6,5	6,5	6,6
125 / 63	125	63	55	7	6	6
125 / 75	125	75	55	7	6,5	7,8
125 / 90	125	90	45	7	6,5	9
125 / 110	125	110	40	7	6,5	10
140 / 75	140	75	55	7	6,5	8,4
140 / 90	140	90	45	7	6,5	8,8
140 / 110	140	110	40	7	6,5	10,5
140 / 125	140	125	40	7	7	11,2
160 / 63	160	63	65	7,5	6	10
160 / 75	160	75	40	7,5	6,5	10,4
160 / 90	160	90	55	7,5	6,5	10,8
160 / 110	160	110	50	7,5	6,5	11
160 / 125	160	125	40	7,5	7	11,3
160 / 140	160	140	40	7,5	7	11,6
200 / 63	200	63	105	7,5	6	11,8
200 / 90	200	90	100	7,5	6,5	12,1
200 / 110	200	110	90	7,5	6,5	14,5
200 / 125	200	125	80	7,5	7	15,4
200 / 160	200	160	70	7,5	7,5	19,2
225 / 63	225	63	100	7,5	6	15,8
225 / 90	225	90	90	7,5	6,5	16,5
225 / 110	225	110	90	7,5	6,5	18,5
225 / 140	225	140	80	7,5	7	18,7
225 / 160	225	160	70	7,5	7,5	21
225 / 200	225	200	60	7,5	7,5	24,5
250 / 110	250	110	100	8,5	6,5	21
250 / 140	250	140	95	8,5	7	23,5
250 / 160	250	160	95	8,5	7,5	23,7
250 / 200	250	200	80	8,5	7,5	24,9

Dimensões em mm.



Características


Construção segundo: EN 12842:2012

Pressão de operação: PN16

Materiais

Corpo: Ferro fundido dúctil (GGG50)

Revestimento: Epóxi potável aplicado electrostaticamente com espessura de $\geq 250\mu\text{m}$

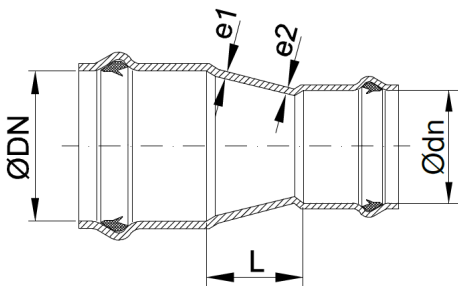

DN / dn	Corpo					Peso (Kg.)
	Ø DN	Ø dn	L	e1	e2	
280 / 90	280	90	130	9	7	31,0
280 / 110	280	110	120	9	7	31,6
280 / 160	280	160	100	9,0	8	32,8
280 / 200	280	200	80	9,0	8	33,5
280 / 225	280	225	70	9,0	8	36,0
280 / 250	280	250	60	9,0	8,5	38,0
315 / 90	315	90	160	9,5	7	32,0
315 / 110	315	110	150	9,5	6,5	34
315 / 125	315	125	150	9,5	7,0	34,0
315 / 140	315	140	160	10	7	35
315 / 160	315	160	125	10	7,5	35,6
315 / 200	315	200	105	10	7,5	38
315 / 225	315	225	100	10	7,5	41
315 / 250	315	250	95	10	8,5	43,0
315 / 280	315	280	80	10	9,0	44,2
355 / 200	355	200	360	9	7,6	46,0
355 / 250	355	250	260	9	8	44,0
355 / 315	355	315	160	9,3	9	42
400 / 250	400	250	200	10,8	8,5	38,0
400 / 315	400	315	160	10,8	9,5	40,0
450 / 315	450	355	360	9,8	8,6	85
450 / 355	450	355	260	9,8	9	83,0
450 / 400	450	400	160	9,8	10	80,0
500 / 315	500	315	460	10,0	9	94,0
500 / 355	500	355	360	10,0	9,3	95,0
500 / 400	500	400	260	10,0	9,5	91,0
500 / 450	500	450	160	10,0	10	96,0
630 / 355	630	355	460	10,0	9,3	145,0
630 / 400	630	400	360	10,0	10	136,0
630 / 450	630	450	260	10,0	9,8	143,0
630 / 500	630	500	160	10,0	10,0	131,0

Dimensões em mm.